

VISUALIZATION OF NOISE EMISSION IN THE INDUSTRY

Ervin LUMNITZER - Alexandra GOGA BODNÁROVÁ

Abstract

A dynamic visualization of noise is the ideal tool for a definite presentation of such events that are not currently recordable vision and its subsequent implementation into the teaching process. It is the visualization tool that allows easier and more effective understanding of complicated issues. The entire implementation process allows modern instrumentation in conjunction with information technology. The „acoustic camera“ is a measurement tool which joined the field of acoustics a few years ago. This technology

analyses the actual sound scene, which consists of a superposition of different sound sources, into a visual sound map. The basic principle relies on accurate calculation of the specific runtime delays of acoustic sound emissions radiating from several sources to the individual microphones of an array. An acoustic map of the local sound pressure distribution at a given distance will be calculated using the acoustic data of all simultaneously recorded microphone channels

Key words

visualization, acoustic camera, sound map

1. INTRODUCTION

In current practice it is necessary unambiguous results presents by easily understandable methods for laymen. Often it is about physical quantities which it isn't possible to visual record. One of these quantities is noise. The process of noise visualization is possible to perform with acoustic camera.

The configuration containing the acoustic camera is a revolutionary solution of three-dimensional localization of sound emission with their quantitative evaluation and frequency analyses in dynamic mode. The amount of obtained and analyzed information is incomparable with all up to now used methods that leaned on measurements of sound emission in immission point that number is considerably limited. The acoustic camera offers possibilities of ideal frequency analyses of sound sources in distance from few tenth meters up to few hundreds meters. The delivered software equipment is able to localize effectively the sound sources and perform qualitative and quantitative analyses and so form a base for soundproofing arrangements.

2. TECHNICAL ENSURING OF THE NOISE VISUALIZATION

Actual commercial beamforming systems, among them the acoustic camera, use a rectangular virtual image plane in order to calculate the run times between microphone array and measurement object. This way the surface of the device under test is approximated, and the z-axis of the array is usually oriented perpendicularly to the image plane. The assumption is made that the device and hence the image plane do not move during the measuring time. Subdividing the image plane into rows and columns results in a finite amount of rectangular display details (pixels) whose centers of area are used to calculate the delays.

State of the art is the simultaneous taking of an optical photo by means of an integrated digital camera and the subsequent automatic overlay with the acoustic colour map. A typical example of an acoustic image is shown in fig. 1.




Fig. 1: Acoustic image

The acoustic camera is modular and flexible equipment for visualization and localization of sound sources. Through visualization, accurate results and fast results decrease the development time of following technical arrangements of noise loading reduction. In the figure 2 is shown the configuration of the acoustic camera.

With Beamforming the main information to find the location of the sound is the run time delay between signals to each microphone. The spatial resolution is in direct relation to the sampling frequency in the time domain and the microphone spacing.

To resolve two sources the system needs to be able to detect differences in the characteristic patterns in form of run time delays independent of post signal processing. This is independent from the resolution which is determined by the signal frequency.


3. SOFTWARE EQUIPMENT OF THE SYSTEM "NOISEIMAGE"

For working with the software „NoiseImage“ a complex but easy to operate intuitive concept of interactions between space, time and frequency has been developed. In order to avoid model assumptions about emitter characteristics, only the equivalent sound pressure level is mapped, i.e. in the acoustic image the value is colour coded that would be generated by a point source in a nonreflexive room at the same distance.

The recorded time functions can be evaluated according to A-, B- or C-weighting. A universal filter bank allows spectral generalisations. In the spectrogram view, noticeable emissions can be marked temporally and spectrally simply by a mouse move and can instantaneously be shown as acoustic photo or movie to identify the related sound source. In photos and movies, the reconstructed time function of every location can be saved as wav-file, it can also be displayed as spectrogram or spectrum. All images can be exported as Bitmaps or JPEGs, movies can be saved as AVI. Spectra can be shown in third octave bands. Listening to the time functions of photos and movies is possible by moving the mouse over the picture. This allows to individually recall recordings even many years old.

When a film is saved as AVI, the stereo sound from the recorded time functions or alternatively the reconstructed time function of a chosen location in the image can be integrated into the exported movie. The according location is then marked by a microphone icon. For the analysis of stationary emissions, the so called „spectral frames“ (a type of spectrally sensitive photo) are an additional tool for interactions between image and spectrum. A mouse click into the picture will immediately show the corresponding spectrum of that location, and vice versa selecting a spectral band from the spectrum will show the related acoustic image covering only those selected spectral components.

Saving a high channel recording generates a file (channel: *.chl) with all the relevant information (time functions, preamplifier parameters, date, distance, video image(s), camera parameters, array coordinates, calibration data etc.). So the channel file does not only contain raw time function data but all necessary parameters belonging to a measurement. Motivation for this decision is a maximum independence of the data analysis from the measurement process: A data file can be evaluated correctly even one year later and even by another person not involved in the measuring process itself.



4. APPLICATION IN THE INDUSTRY

There are exemplified applications of acoustic camera at sound measurements of major industrial sources, in this case an industrial area. In the fig. 2, 3 and 4 are shown the views of the analyzed buildings in an industrial area. In the fig. 5 and 6 are shown the noise emission intensity of fan driving. The critical frequencies recorded at the measurement site are evident from spectrogram, see fig. 7. Structure of the entire frequency spectrum is obvious from the fig. 8, where are clearly shown the critical frequencies.

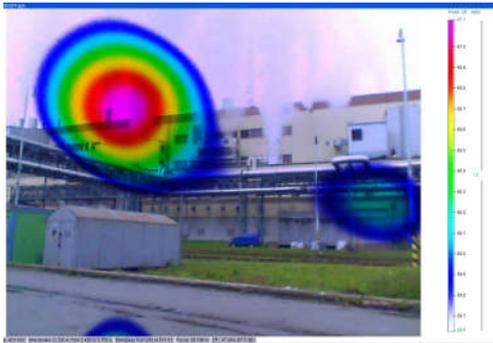


Fig. 2: View of the analyzed buildings – 1st source



Fig. 3: View of the analyzed buildings – 2nd source

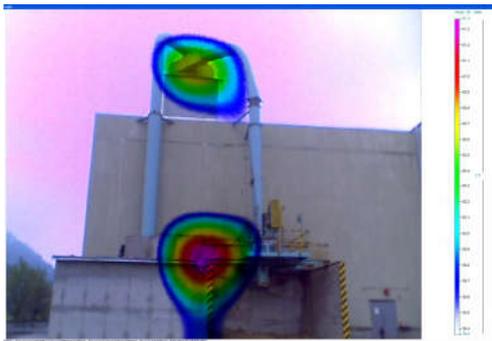


Fig. 4: View of the analyzed buildings – 3rd source



Fig. 5: Visualization of the noise emission intensity of fan driving

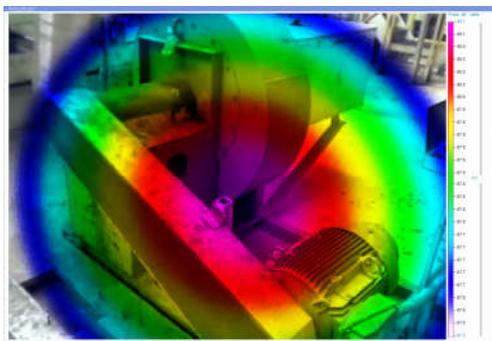


Fig. 6: Visualization of the noise emission intensity of fan driving

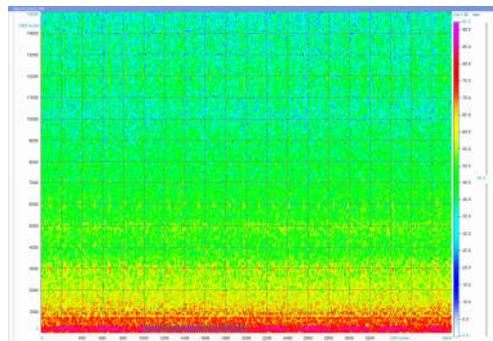


Fig. 7: Spectrogram of the emitted noise

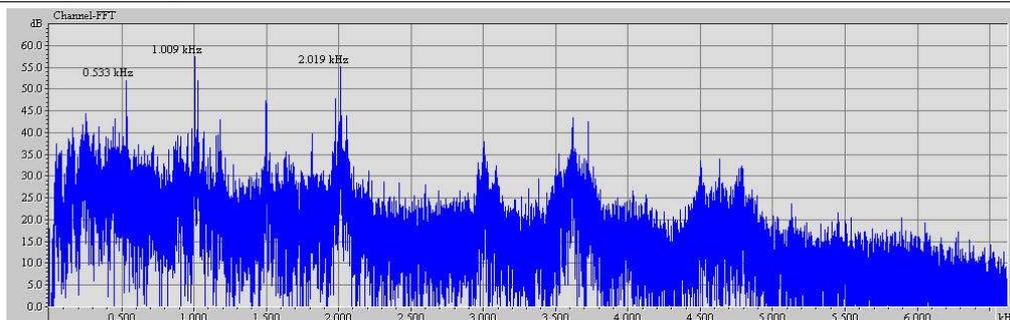



Fig. 8: Frequency spectrum of the recorded noise

CONCLUSION

People perceive about 95% of information visually. Especially this sense is extremely important in the education. It affects remembering information presented and speed of learning. Just in information technologies and their penetration into the teaching process are vital elements that increase the efficiency of the process.

The acoustic camera extends the present analyses procedure. Also involves general methods of the analyses like A-level evaluation, tertiary and narrow-band analyses, filters and other options. It makes possible to provide detailed analyses. The spectrogram makes possible for example recording of the sounds in time and in transmission bandwidth. From the acoustic photo one can localize the sources of these sounds, recall the emitted noise in certain points, show critical frequencies and do all this after provided measurement. The acoustic camera is a multisensorial virtual studio for sound sources analyses in detail.

Acknowledgements:

This paper was supported by projects KEGA 3/7426/09.

REFERENCES

- [1] LUMNITZER, E. - ROMÁNOVÁ, M.: *Modelovanie dopravného hluku a hluku z stacionárnych zdrojov v oblasti mestskej zástavby*. In: Acta Mechanica Slovaca. roč. 9, č. 2-b eiam 05 (2005), s. 225-228. ISSN 1335-239
- [2] Biřová M. - Lumnitzer E.: *Comparison of measurement methods for acoustical parameters determination of sound absorbers*. - In: AEI '2010 : International Conference on Applied Electrical Engineering and Informatics 2010 : Venice, Italy, September 7-10, 2010. - Košice : TU, 2010 S. 49-53. 2010.
- [3] Biřová M., - Lumnitzer E. - Farkašovská Z. - Poláčeková J.: *Evaluation of acoustical insulating material properties In: International Joint Conference on Environmental and Light Industry Technologies*. 18. - 19.11.2010, Budapest, Hungary. - Budapest : Óbuda University, 2010 P. 29-33. 2010.

CONTACT ADDRESS:

Author: prof. Ing. Ervin LUMNITZER, PhD.
Workplace: Technical University of Košice, Faculty of Mechanical Engineering
Address: Park J.A. Komenského 5, 042 00 Košice, Slovak Republic
E-mail: ervin.lumnitzer@tuke.sk

Author: Ing. Alexandra GOGA BODNÁROVÁ
Workplace: Technical University of Košice, Faculty of Mechanical Engineering
Address: Park J.A. Komenského 5, 042 00 Košice, Slovak Republic
E-mail: alexandra.bodnarova@tuke.sk